

地埋灯-TL 系列
LED Underground Light-TL Series



LUL-TL6-36P


产品特点 Features

- * 304不锈钢面盖+压铸铝灯体，散热好，适合经济型亮化项目；
- * 面盖采用底部固定方式，避免安装预埋件是拆卸面盖，造成进水隐患；
- * 通过外部调整螺栓可对灯具打光角度纵向30度内进行调节（安装前调整好）
- * 304 stainless steel cover+die-casting aluminum housing with better heat radiation, which is suitable for economic lighting projects;
- * Fixing cover from the bottom way in order to avoid to open the cover when installing embedded parts and let water in
- * Within the range of 30° from longitudinal side to adjust the projecting angle of fixture's by external regulating bolt


标配型号 & 技术参数 Model Info & Specifications

型号/Model	LUL-TL6-18P	LUL-TL6-24P	LUL-TL6-36P
尺寸/Size	L1018xW90xH83mm	L1018xW90xH83mm	L1018xW90xH83mm
材质/Main body	304不锈钢+铝 / 304 Stainless Steel+Aluminum		
重量/Weight	6.8kg±5%	6.8kg±5%	6.8kg±5%
灯珠数 /LED Quantity	18x1W	24x1W	36x1W
灯珠颜色/Color	单色 /Steady color	单色 /Steady color	单色 /Steady color
输入电压 /Input Volt	24V DC	24V DC	24V DC
最大功率 /Power(Max.)	18W	24W	36W
透镜角度 /LENS	20°/30°/40°	20°/30°/40°	20°/30°/40°
控制方式 /Control Mode	单色 /Steady	单色 /Steady	单色 /Steady

物理 & 安装尺寸 Physical & Installation Dimensions

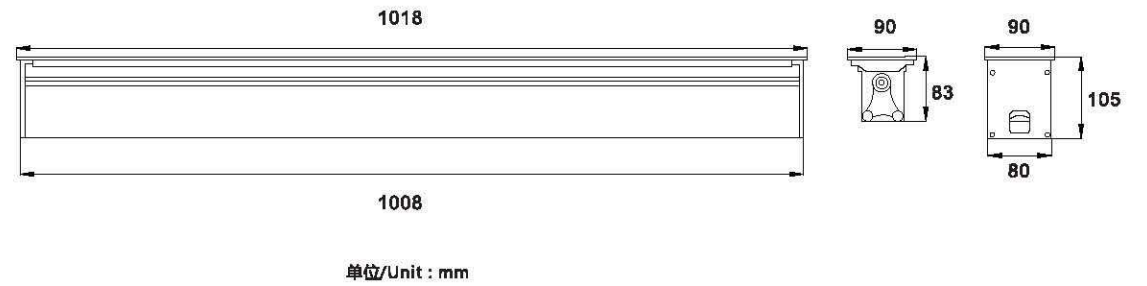

照度图 Illuminance At A Distance

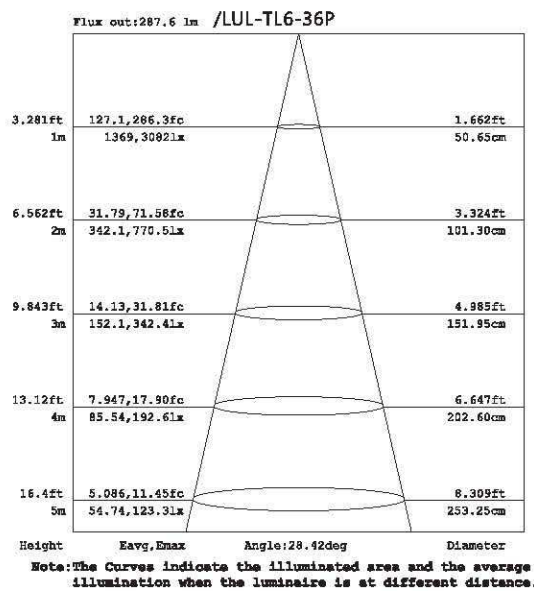

光强分布曲线 Distribution Curve

