



All Download

像素灯-C 系列

LED Pixel Module-C Series







LPM-C1



LPM-C2

物理 & 安装尺寸 Physical & Installation Dimensions



LPM-C1
单位/Unit : mm

LPM-C2
单位/Unit : mm


产品特点 Features

- * 产品的焊接与组装，采用严格的静电保护，保证产品的优良品质
- * 光源采用低热阻，高光效的品牌灯珠，极低的光衰率，达到3万小时的寿命。
- * Strict electrostatic protection adopted to make guaranteed products quality during welding and assembly ;
- * Low thermal resistance, high efficiency LEDs used ,low light decay rate extends LEDs life span to 30,000 hrs.

标配型号 & 技术参数 Model Info & Specifications


型号/Model	LPM-C1-10SMD	LPM-C2-10SMD
尺寸 /Size	D60xH20mm	D60xH45mm
材质 /Main body	透明PC罩+压铸铝/Transparent PC Cover+Die cast Al.	菱型PC罩+压铸铝/The diamond PC Cover+Die cast Al.
重量 /Weight	0.134kgs±5%	0.150kgs±5%
灯珠数 /LED Quantity	10pcs SMD/5050(3in1)	10pcs SMD/5050(3in1)
灯珠颜色 /Color	RGB全彩/RGB 3in1	RGB全彩/RGB 3in1
输入电压 /Input Volt	24V DC	24V DC
最大功率 /Power(Max.)	3W	3W
控制方式 /Control Mode	视频/Video	视频/Video

照度图 Illuminance At A Distance

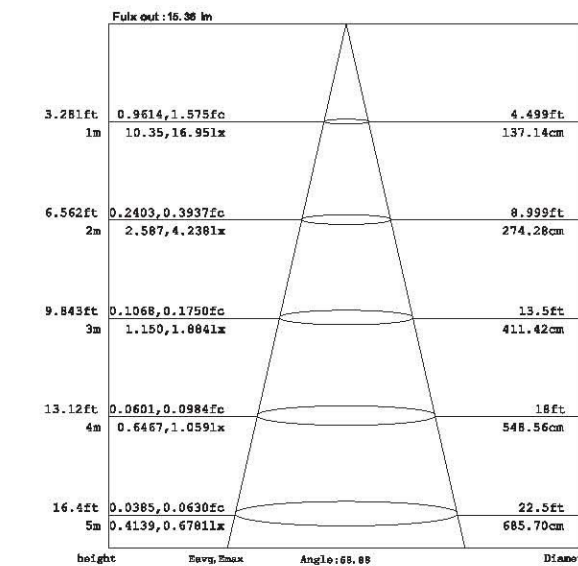

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

光强分布曲线 Distribution Curve

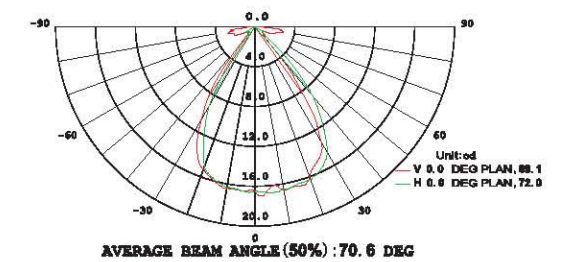

LPM-C1-10SMD

CE IP65
EPISTAR CREE