

泛光灯-WX1/2系列

LED Flood Light WX1/2 Series




All Download



LFL-WX1

LFL-WX2

物理 & 安装尺寸 / Physical & Installation Dimensions

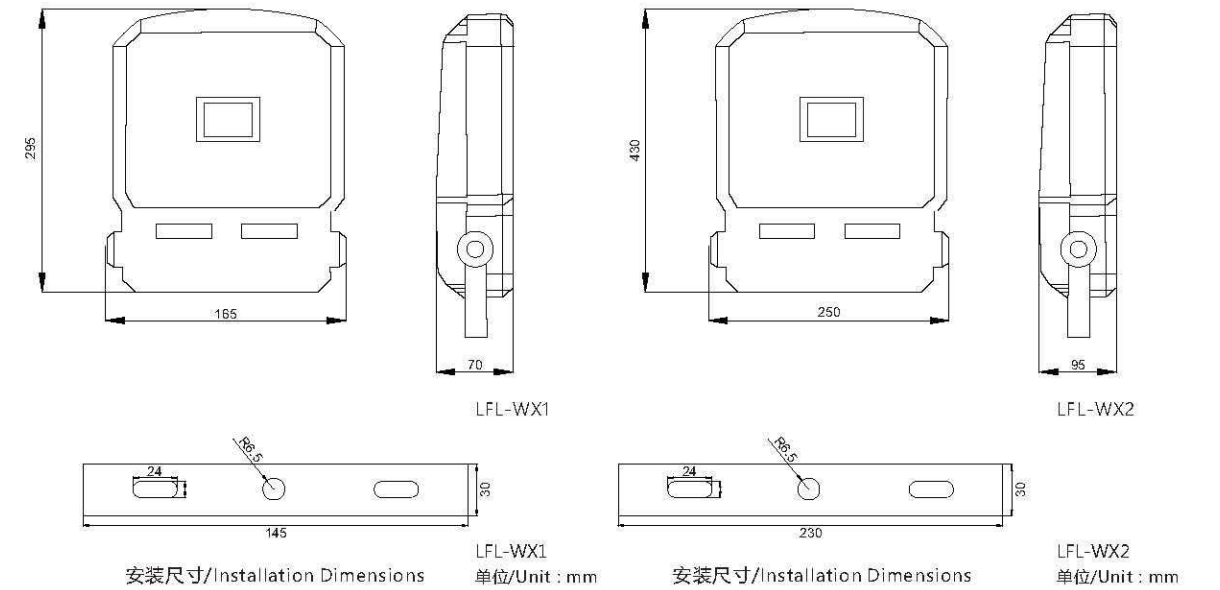


产品特点 / Features

- \*采用多颗芯片集成封装LED为光源,出光均匀,散热好,光衰小
- \*Adopt multi chips for integrated COB light source, good heat radiation, low light decay;
- \*电源宽电压输入100-240VAC,恒压恒流输出,启动速度快,无频闪,防雷击,带PFC功能
- \*Input: 100-240VAC, output constant current and constant voltage, fast power-on without flashing, anti-thunder-stroke, PFC function.


标配型号 & 技术参数 / Model Info & Specifications

型号/Model	LFL-WX1-30W	LFL-WX2-50W/70W
尺寸 /Size	L295xW165xH70mm	L430xW250xH95mm
材质 /Main body	钢化玻璃+铝合金/Tempered glass+Al. alloy	钢化玻璃+铝合金/Tempered glass+Al. alloy
重量 /Weight	3kgs±5%	4.5kgs±5%/6kgs±5%
灯珠数 /LED Quantity	1 pc 30W COB	1 pc 50W/70W COB
灯珠颜色 /Color	白光,中性白,暖白/W,NW,WW	白光,中性白,暖白/W,NW,WW
输入电压 /Input Volt	100V-240V AC	100V-240V AC
最大功率 /Power(Max.)	30W	50W/70W
控制方式 /Control Mode	常亮/Steady	常亮/Steady

照度图 / Illuminance At A Distance

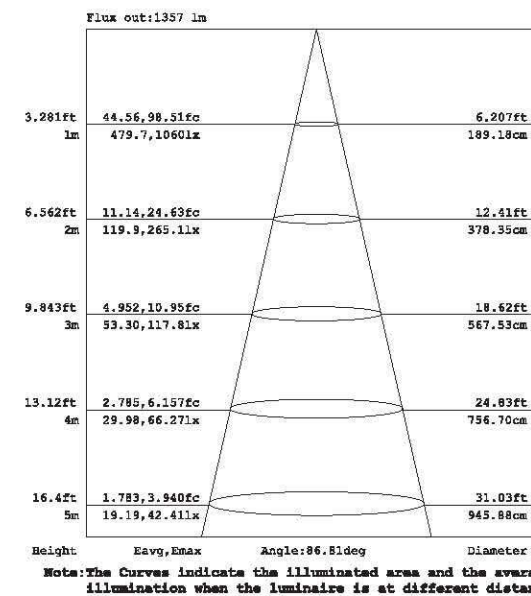

光强分布曲线 / Distribution Curve

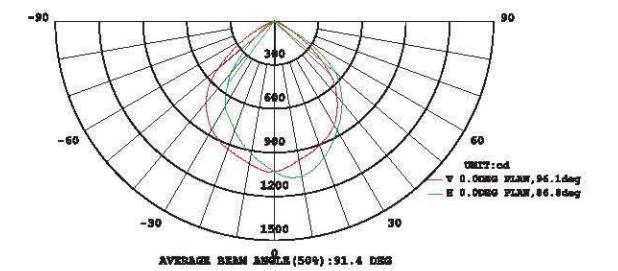

LFL-WX1-30W Beam Angle: 100°

